

LOW VOLTAGE C-MOS OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The NJU7001, 02 and 04 are single, dual and quad C-MOS Operational Amplifiers operated on a single-power-supply, low voltage and low operating current.

The minimum operating voltage is 1V and the output stage permits output signals to swing between both of the supply rails.


The input bias current is as low as less than 1pA, consequently the very small signal around the ground level can be amplified.

Furthermore, the operating current is also as low as 15 μA(typ) per circuit, therefore it can be applied especially to battery operated items.

■ FEATURES

- Single-Power-Supply
  - Wide Operating Voltage (V<sub>DD</sub>=1~16V)
  - Wide Output Swing Range (V<sub>OM</sub>=2.94V typ. at V<sub>DD</sub>=3V)
  - Low Operating Current (15 μA/circuit)
  - Low Bias Current (I<sub>in</sub>=1pA)
  - Internal Compensation Capacitor
  - External Offset Null Adjustment (Only NJU7001)
  - Package Outline
- DIP/DMP/SSOP 8 (NJU7001)  
DIP/DMP 8 (NJU7002)  
DIP/DMP/SSOP 14 (NJU7004)
- C-MOS Technology


■ PACKAGE OUTLINE




NJU7001B  
NJU7002D



NJU7001M  
NJU7002M




NJU7004D



NJU7004M






NJU7001V




NJU7004V

■ PIN CONFIGURATION

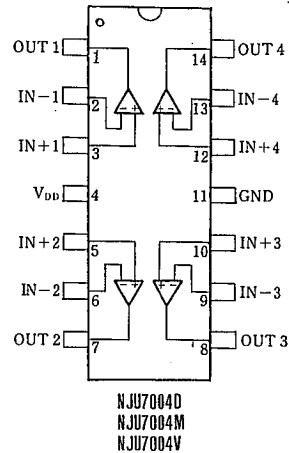

■ EQUIVALENT CIRCUIT

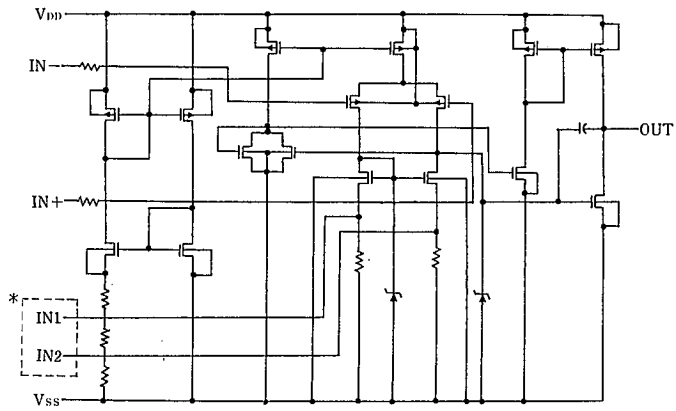

\* IN1, IN2 are only for NJU7001(NJU7002/04 don't have these terminals).

4

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sub>DD</sub>	18	V
Differential Input Voltage	V <sub>ID</sub>	±18 *1	V
Common Mode Input Voltage	V <sub>IC</sub>	-0.3~18	V
Power Dissipation	P <sub>D</sub>	(DIP14) 700 (DIP8) 500 (DMP8,14) 300 (SSOP8,14) 300	mW
Operating Temperature	T <sub>opr</sub>	-20~+75	°C
Storage Temperature	T <sub>stg</sub>	-40~+125	°C


\* 1) If the supply voltage (V<sub>DD</sub>) is less than 18V, the input voltage must not over the V<sub>DD</sub> level though 18V is limit specified.

## ■ ELECTRICAL CHARACTERISTICS

(Ta=25°C, V<sub>DD</sub>=3V, R<sub>L</sub>=∞)


PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	V <sub>IO</sub>	R <sub>S</sub> =50Ω			10	mV
Input Offset Current	I <sub>IO</sub>			1		pA
Input Bias Current	I <sub>IB</sub>			1		pA
Input Impedance	R <sub>IN</sub>			1		TΩ
Large Signal Voltage Gain	A <sub>v</sub>		80	90		dB
Input Common Mode Voltage Range	V <sub>ICM</sub>		0~2			V
Maximum Output Swing Voltage	V <sub>OM</sub>	R <sub>L</sub> =1MΩ	2.90	2.94		V
Common Mode Rejection Ratio	CMR		60	70		dB
Supply Voltage Rejection Ratio	SVR		60	70		dB
Operating Current / Circuit	I <sub>DD</sub>			15	25	μA
Slew Rate	SR			0.05		V/μs
Unity Gain Bandwidth	F <sub>t</sub>	A <sub>v</sub> =40dB C <sub>L</sub> =10pF		0.1		MHz

## ■ OFFSET ADJUSTMENT CIRCUIT (ONLY FOR NJU7001)

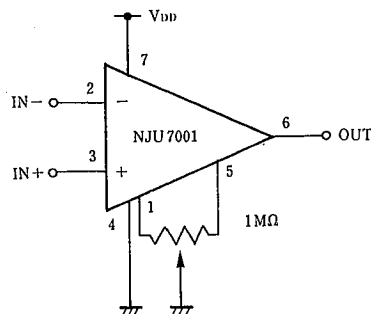


■ TYPICAL CHARACTERISTICS


Operating Current vs. Operating Voltage

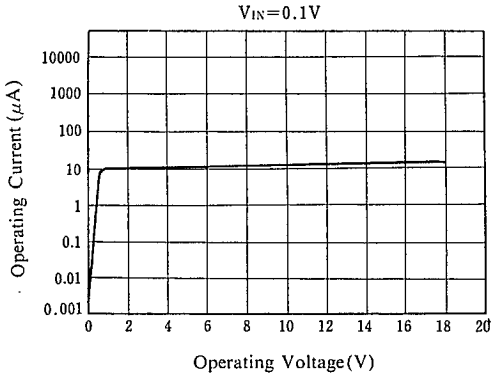


Offset Voltage vs. Operating Voltage

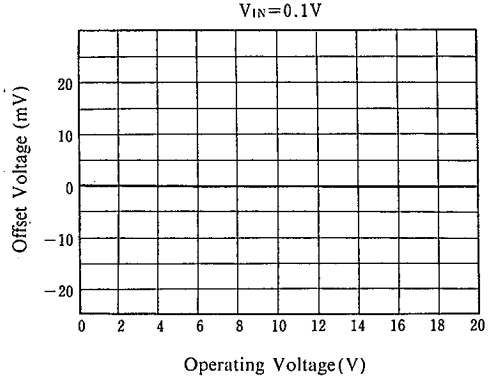


Output Current vs. Operating Voltage

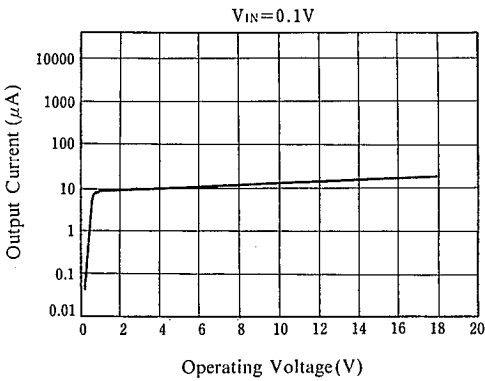


Offset Voltage vs. Input Voltage

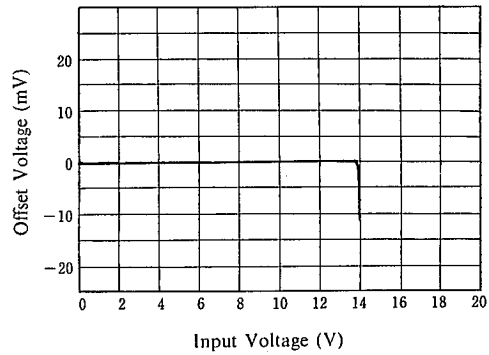

Output Voltage vs. Output Current

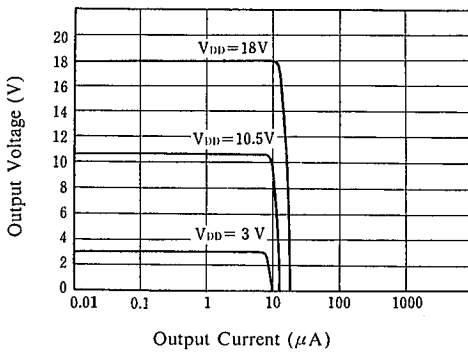


Maximum Output Swing Voltage vs. Frequency

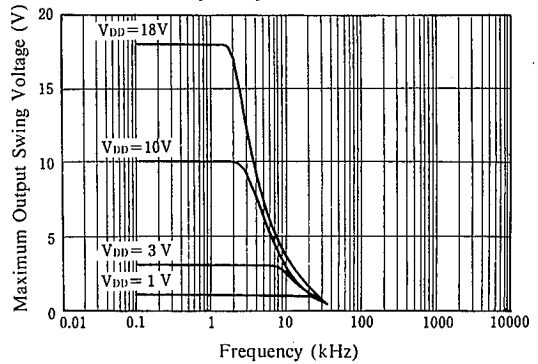


4

■ TYPICAL CHARACTERISTICS


Maximum Output Swing Voltage vs. Load Resistance

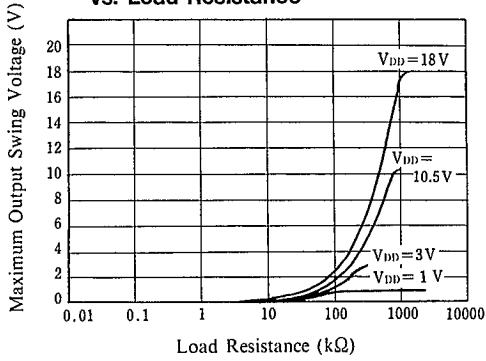

Voltage Gain • Phase vs. Frequency

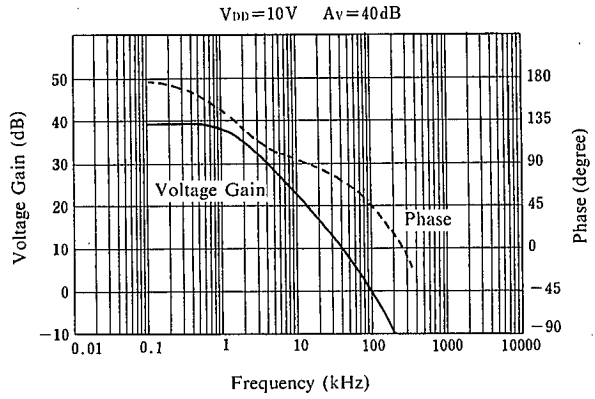

Equivalent Input Noise Voltage vs. Frequency

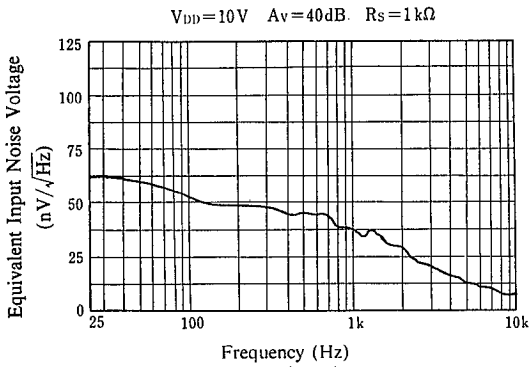

4

## MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.