



# Shielded Power Inductors - LPS3010 Series



- Ultra small 3.0 × 3.0 mm footprint; less than 1.0 mm tall
- Very low DCR; excellent current handling

**Core material** Ferrite

**Core and winding loss** See [www.coilcraft.com/coreloss](http://www.coilcraft.com/coreloss)

**Terminations** RoHS compliant silver-palladium-platinum-glass frit. Other terminations available at additional cost.

**Weight** 25 – 32 mg

**Ambient temperature** -40°C to +85°C with I<sub>rms</sub> current, +85°C to +125°C with derated current

**Storage temperature** Component: -40°C to +125°C. Packaging: -40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)** 38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

**Packaging** 1000/7" reel; 3500/13" reel; Plastic tape: 12 mm wide, 0.23 mm thick, 8 mm pocket spacing, 1.4 mm pocket depth

**Recommended pick and place nozzle** OD: 3 mm; ID: ≤ 1.5 mm

**PCB washing** Only pure water or alcohol recommended

Part number <sup>1</sup>	Inductance <sup>2</sup> ±20% (µH)	DCR max <sup>3</sup> (Ohms)	SRF typ <sup>4</sup> (MHz)	Isat (A) <sup>5</sup>			Irms (A) <sup>6</sup>	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
LPS3010-471ML_	0.47	0.070	370	1.8	1.9	2.0	1.3	1.80
LPS3010-681ML_	0.68	0.080	270	1.6	1.7	1.7	1.3	1.75
LPS3010-102ML_	1.0	0.085	230	1.5	1.6	1.6	1.1	1.50
LPS3010-152ML_	1.5	0.120	165	1.3	1.4	1.4	1.05	1.40
LPS3010-182ML_	1.8	0.150	150	1.2	1.2	1.3	1.00	1.40
LPS3010-222ML_	2.2	0.220	130	1.3	1.4	1.4	0.90	1.10
LPS3010-332ML_	3.3	0.220	110	0.83	0.88	0.90	0.85	1.10
LPS3010-472ML_	4.7	0.300	92	0.72	0.75	0.77	0.70	0.95
LPS3010-562ML_	5.6	0.400	80	0.67	0.69	0.71	0.60	0.78
LPS3010-682ML_	6.8	0.450	70	0.61	0.63	0.64	0.56	0.74
LPS3010-822ML_	8.2	0.520	62	0.56	0.59	0.59	0.53	0.70
LPS3010-103ML_	10	0.540	58	0.50	0.53	0.55	0.48	0.64
LPS3010-123ML_	12	0.700	47	0.46	0.49	0.50	0.44	0.58
LPS3010-153ML_	15	0.950	43	0.41	0.43	0.44	0.37	0.48
LPS3010-183ML_	18	1.10	40	0.38	0.40	0.41	0.33	0.47
LPS3010-223ML_	22	1.20	36	0.32	0.35	0.36	0.30	0.41
LPS3010-333ML_	33	2.00	27	0.25	0.27	0.28	0.26	0.35
LPS3010-473ML_	47	3.20	21	0.23	0.24	0.25	0.22	0.31
LPS3010-683ML_	68	3.50	21	0.20	0.21	0.22	0.20	0.28
LPS3010-104ML_	100	5.25	14	0.14	0.16	0.17	0.18	0.24
LPS3010-124ML_	120	6.10	12	0.13	0.15	0.15	0.14	0.19
LPS3010-154ML_	150	9.15	11	0.13	0.14	0.14	0.13	0.17
LPS3010-184ML_	180	10.1	9	0.11	0.12	0.13	0.11	0.15
LPS3010-224ML_	220	12.5	8	0.10	0.11	0.12	0.095	0.13
LPS3010-334ML_	330	18.5	7	0.10	0.105	0.115	0.085	0.11

Coilcraft **Designer's Kit C392** contains samples of 0.80 µH to 33 µH parts (3 each) from LPS3008, LPS3010 and LPS3015. **Kit C401** contains samples of 0.56 µH to 33 µH parts (3 each) from LPS4012 and LPS4018. **Kit C402** contains samples of 220 µH to 3300 µH parts (3 each) from all five series. For details of kit contents and to order, contact Coilcraft or visit <http://order.coilcraft.com>.

**Coilcraft**®

Specifications subject to change without notice.  
Please check our website for latest information.

Document 428-1 Revised 08/05/09


1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail [info@coilcraft.com](mailto:info@coilcraft.com) Web <http://www.coilcraft.com>




# Shielded SMT Power Inductors – LPS3010 Series



## L vs Frequency

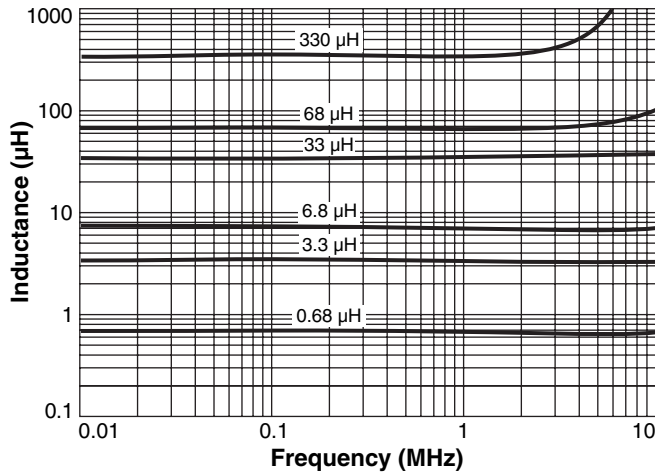

## L vs Current

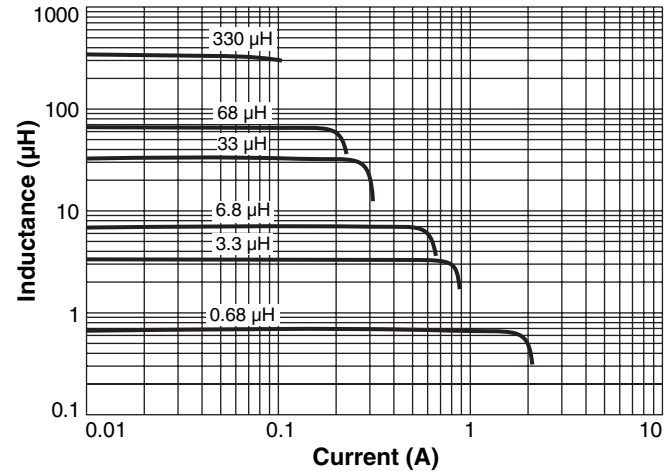

## Typical Current Derating

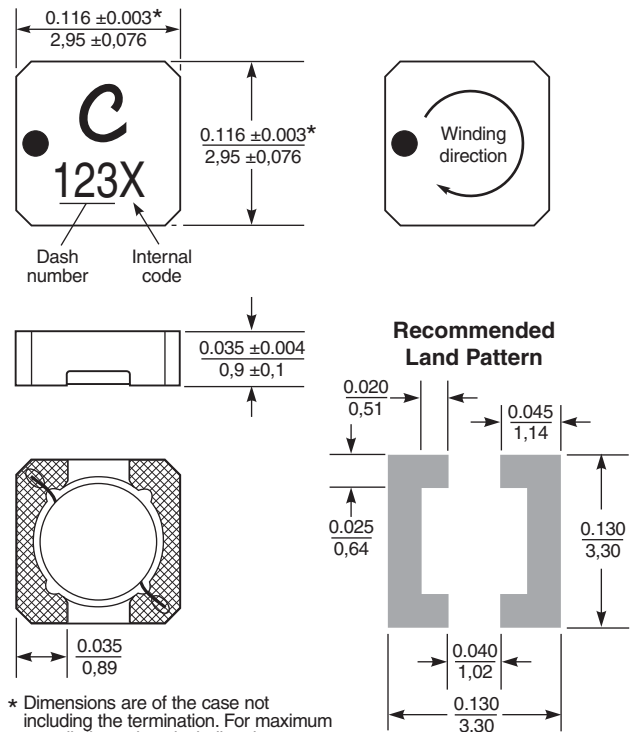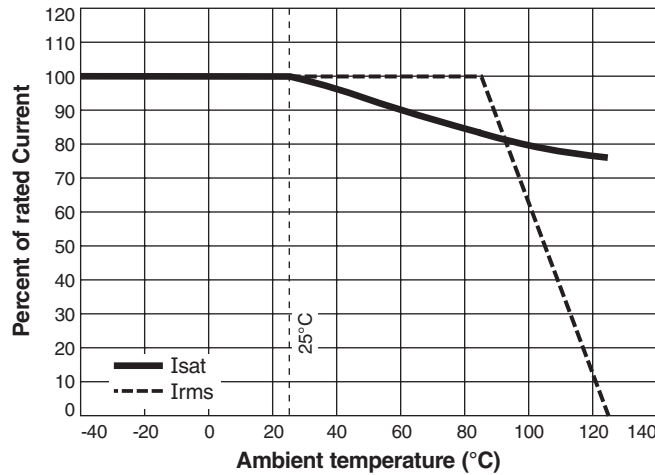

\* Dimensions are of the case not including the termination. For maximum overall dimensions including the termination, add 0.005 in / 0,13 mm.

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$



Specifications subject to change without notice.  
Please check our website for latest information.

Document 428-2 Revised 08/05/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail [info@coilcraft.com](mailto:info@coilcraft.com) Web <http://www.coilcraft.com>