

TAJ Series

Standard Tantalum




- General purpose SMT chip tantalum series
- 7 case sizes available
- Low profile options available
- CV range: 0.10-2200 μ F / 2.5-50V



SnPb termination option is not RoHS compliant.

CASE DIMENSIONS: millimeters (inches)

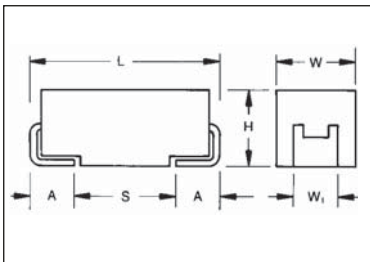

For part marking see page 151

| Code | EIA Code | EIA Metric | L \pm 0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H+0.20 (0.008) -0.10 (0.004) | W \pm 0.20 (0.008) | A+0.30 (0.012) -0.20 (0.008) | S Min. |
|------|----------|------------|----------------------|------------------------------|------------------------------|----------------------|------------------------------|--------------|
| A | 1206 | 3216-18 | 3.20 (0.126) | 1.60 (0.063) | 1.60 (0.063) | 1.20 (0.047) | 0.80 (0.031) | 1.10 (0.043) |
| B | 1210 | 3528-21 | 3.50 (0.138) | 2.80 (0.110) | 1.90 (0.075) | 2.20 (0.087) | 0.80 (0.031) | 1.40 (0.055) |
| C | 2312 | 6032-28 | 6.00 (0.236) | 3.20 (0.126) | 2.60 (0.102) | 2.20 (0.087) | 1.30 (0.051) | 2.90 (0.114) |
| D | 2917 | 7343-31 | 7.30 (0.287) | 4.30 (0.169) | 2.90 (0.114) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| E | 2917 | 7343-43 | 7.30 (0.287) | 4.30 (0.169) | 4.10 (0.162) | 2.40 (0.094) | 1.30 (0.051) | 4.40 (0.173) |
| U | 2924 | 7361-43 | 7.30 (0.287) | 6.10 (0.240) | 4.10 (0.162) | 3.10 (0.120) | 1.30 (0.051) | 4.40 (0.173) |
| V | 2924 | 7361-38 | 7.30 (0.287) | 6.10 (0.240) | 3.55 (0.140) | 3.10 (0.120) | 1.30 (0.051) | 4.40 (0.173) |

W₁: dimension applies to the termination width for A dimensional area only.

HOW TO ORDER

| | | | | | | | |
|-------------|-------------------------------------|---|--------------------------------------|---|--|---|---|
| TAJ | C | 106 | M | 035 | R | NJ | - |
| Type | Case Size See table above | Capacitance Code pF code: 1st two digits represent significant figures 3rd digit represents multiplier (number of zeros to follow) | Tolerance K=±10% M=±20% | Rated DC Voltage 002=2.5Vdc 004=4Vdc 006=6.3Vdc 010=10Vdc 016=16Vdc 020=20Vdc 025=25Vdc 035=35Vdc 050=50Vdc | Packaging R = Pure Tin 7" Reel S = Pure Tin 13" Reel A = Gold Plating 7" Reel B = Gold Plating 13" Reel H = Tin Lead 7" Reel (Contact Manufacturer) K = Tin Lead 13" Reel (Contact Manufacturer) H, K = Non RoHS | Specification Suffix NJ = Standard Suffix | Additional characters may be added for special requirements V = Dry pack Option (selected codes only) |

TECHNICAL SPECIFICATIONS

| | | | | | | | | | | | |
|------------------------------------|--|-----|-----|-----|----|----|----|----|----|----|--|
| Technical Data: | All technical data relate to an ambient temperature of +25°C | | | | | | | | | | |
| Capacitance Range: | 0.10 μ F to 2200 μ F | | | | | | | | | | |
| Capacitance Tolerance: | \pm 10%; \pm 20% | | | | | | | | | | |
| Rated Voltage (V _R) | \leq +85°C: | 2.5 | 4 | 6.3 | 10 | 16 | 20 | 25 | 35 | 50 | |
| Category Voltage (V _C) | \leq +125°C: | 1.7 | 2.7 | 4 | 7 | 10 | 13 | 17 | 23 | 33 | |
| Surge Voltage (V _S) | \leq +85°C: | 3.3 | 5.2 | 8 | 13 | 20 | 26 | 32 | 46 | 65 | |
| Surge Voltage (V _S) | \leq +125°C: | 2.2 | 3.4 | 5 | 8 | 13 | 16 | 20 | 28 | 40 | |
| Temperature Range: | -55°C to +125°C | | | | | | | | | | |
| Reliability: | 1% per 1000 hours at 85°C, V _R with 0.1 Ω /V series impedance, 60% confidence level | | | | | | | | | | |
| Qualification: | CECC 30801 - 005 issue 2 EIA 535BAAC | | | | | | | | | | |
| Termination Finished: | Sn Plating (standard), Gold and SnPb Plating upon request For AEC-Q200 availability, please contact AVX | | | | | | | | | | |



Standard Tantalum

CAPACITANCE AND RATED VOLTAGE, VR (VOLTAGE CODE) RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated voltage DC (V _R) to 85°C | | | | | | | | |
|-------------|------|--|-----------------------|------------------------------------|-------------------------|-----------------------|------------------------|---------------------|---------|-----------------------|
| µF | Code | 2.5V (e) | 4V (G) | 6.3V (J) | 10V (A) | 16V (C) | 20V (D) | 25V (E) | 35V (V) | 50V (T) |
| 0.10 | 104 | | | | | | | | A | A |
| 0.15 | 154 | | | | | | | | A | A/B |
| 0.22 | 224 | | | | | | | | A | A/B |
| 0.33 | 334 | | | | | | | A | A | A/B |
| 0.47 | 474 | | | | | | A | A | A/B | A/B/C |
| 0.68 | 684 | | | | | | A | A | A/B | A/B/C |
| 1.0 | 105 | | | | | A | A | A | A/B | A ^(M) /B/C |
| 1.5 | 155 | | | | A | A | A | A/B | A/B/C | B/C/D |
| 2.2 | 225 | | | A | A | A/B | A/B | A/B | A/B/C | B/C/D |
| 3.3 | 335 | | A | A | A | A/B | A/B | A/B/C | A/B/C | B/C |
| 4.7 | 475 | | A | A | A/B | A/B | A/B/C | A/B/C | A/B/C | B/C/D |
| 6.8 | 685 | | A | A/B | A/B | A/B/C | A/B/C | B/C | B/C | C/D |
| 10 | 106 | | A | A/B | A/B/C | A/B/C | A ^(M) */B/C | B/C/D | C/D/E | D/E/V |
| 15 | 156 | | A/B | A/B | A/B/C | A ^(M) /B/C | B/C/D | C/D | C/D | D/E/V |
| 22 | 226 | | A | A/B/C | A/B/C | B/C/D | B/C/D | C/D | D/E | V |
| 33 | 336 | A | A/B | A/B/C | A/B/C/D | B/C/D | C/D | C/D | D/E | D/E/V |
| 47 | 476 | A | A/B | A/B/C/D | B/C/D | C/D | C/D/E | D/E | D/E | E/V |
| 68 | 686 | A | A/B/C | B/C/D | B/C/D | C/D | C ^(M) /D/E | E/V | E/V | V |
| 100 | 107 | A/B | A/B/C | B/C/D | B ^(M) /C/D/E | C/D/E | D/E/V | E ^(M) /V | | |
| 150 | 157 | B | B/C | B ^(M) /C/D | C/D/E | D/E/V | E/V | V ^(M) | | |
| 220 | 227 | B/D | B ^(M) /C/D | C/D/E | C/D/E | E/V | | | | |
| 330 | 337 | D | C/D/E | C/D/E | D/E/V | E ^(M) | | | | |
| 470 | 477 | C/D | C/D/E | D/E/V | E/U/V | | | | | |
| 680 | 687 | C/D/E | D/E | E/V | | | | | | |
| 1000 | 108 | D ^(M) /E | D/E/V | E ^(M) /V ^(M) | | | | | | |
| 1500 | 158 | D/E/V ^(M) | E/V ^(M) | | | | | | | |
| 2200 | 228 | V ^(M) | | | | | | | | |

Not recommended for new designs, higher voltage or smaller case size substitution are offered.

Released codes ^(M tolerance only)

Engineering samples - please contact manufacturer

*Codes under development - subject to change

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.

TAJ Series

Standard Tantalum



RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Cap (µF) | Rated Voltage (V) | DCL (µA) Max. | DF % Max. | ESR Max. (Ω) @100kHz | MSL |
|---|-----------|----------|-------------------|---------------|-----------|----------------------|-----------------|
| 2.5 Volt @ 85°C (1.7 Volt @ 125°C) | | | | | | | |
| TAJA336*002#NJ | A | 33 | 2.5 | 0.8 | 8 | 1.7 | 1 |
| TAJA476*002#NJ | A | 47 | 2.5 | 0.9 | 6 | 3 | 1 |
| TAJA686*002#NJ | A | 68 | 2.5 | 1.4 | 8 | 1.5 | 1 |
| TAJA107*002#NJ | A | 100 | 2.5 | 2.5 | 30 | 1.4 | 1 |
| TAJB107*002#NJ | B | 100 | 2.5 | 2.5 | 8 | 1.4 | 1 |
| TAJB157*002#NJ | B | 150 | 2.5 | 3 | 10 | 1.6 | 1 |
| TAJB227*002#NJ | B | 220 | 2.5 | 4.4 | 16 | 1.6 | 1 |
| TAJD227*002#NJ | D | 220 | 2.5 | 5.5 | 8 | 0.3 | 1 |
| TAJD337*002#NJ | D | 330 | 2.5 | 8.2 | 8 | 0.3 | 1 |
| TAJC477*002#NJ | C | 470 | 2.5 | 9.4 | 12 | 0.2 | 1 |
| TAJD477*002#NJ | D | 470 | 2.5 | 11.6 | 8 | 0.2 | 1 |
| TAJC687*002#NJ | C | 680 | 2.5 | 17.0 | 18 | 0.2 | 1 |
| TAJD687*002#NJ | D | 680 | 2.5 | 17 | 16 | 0.2 | 1 |
| TAJE687*002#NJ | E | 680 | 2.5 | 17 | 10 | 0.2 | 1 ¹⁾ |
| TAJD108M002#NJ | D | 1000 | 2.5 | 25 | 20 | 0.2 | 1 |
| TAJE108*002#NJ | E | 1000 | 2.5 | 20 | 14 | 0.4 | 1 ¹⁾ |
| TAJD158*002#NJ | D | 1500 | 2.5 | 37.5 | 60 | 0.2 | 1 |
| TAJE158*002#NJ | E | 1500 | 2.5 | 37 | 20 | 0.2 | 1 ¹⁾ |
| TAJV158M002#NJ | V | 1500 | 2.5 | 30 | 20 | 0.2 | 1 ¹⁾ |
| TAJV228M002#NJ | V | 2200 | 2.5 | 55 | 50 | 0.2 | 1 ¹⁾ |
| 4 Volt @ 85°C (2.7 Volt @ 125°C) | | | | | | | |
| TAJA336*004#NJ | A | 33 | 4 | 1.3 | 6 | 3 | 1 |
| TAJA476*004#NJ | A | 47 | 4 | 1.9 | 8 | 2.6 | 1 |
| TAJA686*004#NJ | A | 68 | 4 | 2.7 | 10 | 1.5 | 1 |
| TAJB686*004#NJ | B | 68 | 4 | 2.7 | 6 | 1.8 | 1 |
| TAJA107*004#NJ | A | 100 | 4 | 4 | 30 | 1.4 | 1 |
| TAJB107*004#NJ | B | 100 | 4 | 4 | 8 | 0.9 | 1 |
| TAJB157*004#NJ | B | 150 | 4 | 6 | 10 | 1.5 | 1 |
| TAJC157*004#NJ | C | 150 | 4 | 6 | 6 | 0.3 | 1 |
| TAJB227M004#NJ | B | 220 | 4 | 8.8 | 12 | 1.1 | 1 |
| TAJC227*004#NJ | C | 220 | 4 | 8.8 | 8 | 1.2 | 1 |
| TAJD227*004#NJ | D | 220 | 4 | 8.8 | 8 | 0.9 | 1 |
| TAJC337*004#NJ | C | 330 | 4 | 13.2 | 8 | 0.3 | 1 |
| TAJD337*004#NJ | D | 330 | 4 | 13.2 | 8 | 0.9 | 1 |
| TAJC477*004#NJ | C | 470 | 4 | 18.8 | 14 | 0.3 | 1 |
| TAJD477*004#NJ | D | 470 | 4 | 18.8 | 12 | 0.9 | 1 |
| TAJE477*004#NJ | E | 470 | 4 | 18.8 | 10 | 0.5 | 1 ¹⁾ |
| TAJD687*004#NJ | D | 680 | 4 | 27.2 | 14 | 0.5 | 1 |
| TAJE687*004#NJ | E | 680 | 4 | 27.2 | 14 | 0.9 | 1 ¹⁾ |
| TAJD108*004#NJ | D | 1000 | 4 | 40 | 60 | 0.2 | 1 |
| TAJE108*004#NJ | E | 1000 | 4 | 40 | 14 | 0.4 | 1 ¹⁾ |
| TAJV108*004#NJ | V | 1000 | 4 | 40 | 16 | 0.2 | 1 ¹⁾ |
| TAJE158*004#NJ | E | 1500 | 4 | 60 | 30 | 0.2 | 1 ¹⁾ |
| TAJV158M004#NJ | V | 1500 | 4 | 60 | 30 | 0.2 | 1 ¹⁾ |
| 6.3 Volt @ 85°C (4 Volt @ 125°C) | | | | | | | |
| TAJA106*006#NJ | A | 10 | 6.3 | 0.6 | 6 | 4 | 1 |
| TAJA156*006#NJ | A | 15 | 6.3 | 0.9 | 6 | 3.5 | 1 |
| TAJA226*006#NJ | A | 22 | 6.3 | 1.4 | 6 | 3 | 1 |
| TAJA336*006#NJ | A | 33 | 6.3 | 2.1 | 8 | 2.2 | 1 |
| TAJA476*006#NJ | A | 47 | 6.3 | 2.8 | 10 | 1.6 | 1 |
| TAJB476*006#NJ | B | 47 | 6.3 | 3 | 6 | 2 | 1 |
| TAJC476*006#NJ | C | 47 | 6.3 | 3 | 6 | 1.6 | 1 |
| TAJB686*006#NJ | B | 68 | 6.3 | 4 | 8 | 0.9 | 1 |
| TAJC686*006#NJ | C | 68 | 6.3 | 4.3 | 6 | 1.5 | 1 |
| TAJB107*006#NJ | B | 100 | 6.3 | 6.3 | 10 | 1.7 | 1 |
| TAJC107*006#NJ | C | 100 | 6.3 | 6.3 | 6 | 0.9 | 1 |
| TAJB157M006#NJ | B | 150 | 6.3 | 9.5 | 10 | 1.2 | 1 |
| TAJC157*006#NJ | C | 150 | 6.3 | 9.5 | 6 | 1.3 | 1 |

| AVX Part No. | Case Size | Cap (µF) | Rated Voltage (V) | DCL (µA) Max. | DF % Max. | ESR Max. (Ω) @100kHz | MSL |
|---|-----------|----------|-------------------|---------------|-----------|----------------------|-----------------|
| TAJD157*006#NJ | D | 150 | 6.3 | 9.5 | 6 | 0.9 | 1 |
| TAJC227*006#NJ | C | 220 | 6.3 | 13.9 | 8 | 1.2 | 1 |
| TAJD227*006#NJ | D | 220 | 6.3 | 13.9 | 8 | 0.4 | 1 |
| TAJE227*006#NJ | E | 220 | 6.3 | 13.9 | 8 | 0.4 | 1 ¹⁾ |
| TAJC337*006#NJ | C | 330 | 6.3 | 19.8 | 12 | 0.5 | 1 |
| TAJD337*006#NJ | D | 330 | 6.3 | 20.8 | 8 | 0.4 | 1 |
| TAJE337*006#NJ | E | 330 | 6.3 | 20.8 | 8 | 0.4 | 1 ¹⁾ |
| TAJD477*006#NJ | D | 470 | 6.3 | 28 | 12 | 0.4 | 1 |
| TAJE477*006#NJ | E | 470 | 6.3 | 28 | 10 | 0.4 | 1 ¹⁾ |
| TAJV477*006#NJ | V | 470 | 6.3 | 28 | 10 | 0.4 | 1 ¹⁾ |
| TAJE687*006#NJ | E | 680 | 6.3 | 42.8 | 10 | 0.5 | 1 ¹⁾ |
| TAJV687*006#NJ | V | 680 | 6.3 | 42.8 | 10 | 0.5 | 1 ¹⁾ |
| TAJE108M006#NJ | E | 1000 | 6.3 | 60 | 20 | 0.2 | 1 ¹⁾ |
| TAJV108M006#NJ | V | 1000 | 6.3 | 60 | 16 | 0.2 | 1 ¹⁾ |
| 10 Volt @ 85°C (7 Volt @ 125°C) | | | | | | | |
| TAJA475*010#NJ | A | 4.7 | 10 | 0.5 | 6 | 5 | 1 |
| TAJA685*010#NJ | A | 6.8 | 10 | 0.7 | 6 | 4 | 1 |
| TAJA106*010#NJ | A | 10 | 10 | 1 | 6 | 3 | 1 |
| TAJA156*010#NJ | A | 15 | 10 | 1.5 | 6 | 3.2 | 1 |
| TAJB156*010#NJ | B | 15 | 10 | 1.5 | 6 | 2.8 | 1 |
| TAJA226*010#NJ | A | 22 | 10 | 2.2 | 8 | 3 | 1 |
| TAJB226*010#NJ | B | 22 | 10 | 2.2 | 6 | 2.4 | 1 |
| TAJA336*010#NJ | A | 33 | 10 | 3.3 | 8 | 1.7 | 1 |
| TAJB336*010#NJ | B | 33 | 10 | 3.3 | 6 | 1.8 | 1 |
| TAJC336*010#NJ | C | 33 | 10 | 3.3 | 6 | 1.6 | 1 |
| TAJB476*010#NJ | B | 47 | 10 | 4.7 | 8 | 1 | 1 |
| TAJC476*010#NJ | C | 47 | 10 | 4.7 | 6 | 1.2 | 1 |
| TAJB686*010#NJ | B | 68 | 10 | 6.8 | 6 | 1.4 | 1 |
| TAJC686*010#NJ | C | 68 | 10 | 6.8 | 6 | 1.3 | 1 |
| TAJB107M010#NJ | B | 100 | 10 | 10 | 8 | 1.4 | 1 |
| TAJC107*010#NJ | C | 100 | 10 | 10 | 8 | 1.2 | 1 |
| TAJD107*010#NJ | D | 100 | 10 | 10 | 6 | 0.9 | 1 |
| TAJC157*010#NJ | C | 150 | 10 | 15 | 8 | 0.9 | 1 |
| TAJD157*010#NJ | D | 150 | 10 | 15 | 8 | 0.9 | 1 |
| TAJE157*010#NJ | E | 150 | 10 | 15 | 8 | 0.9 | 1 ¹⁾ |
| TAJC227*010#NJ | C | 220 | 10 | 22 | 16 | 0.5 | 1 |
| TAJD227*010#NJ | D | 220 | 10 | 22 | 8 | 0.5 | 1 |
| TAJE227*010#NJ | E | 220 | 10 | 22 | 8 | 0.5 | 1 ¹⁾ |
| TAJD337*010#NJ | D | 330 | 10 | 33 | 8 | 0.9 | 1 |
| TAJE337*010#NJ | E | 330 | 10 | 33 | 8 | 0.9 | 1 ¹⁾ |
| TAJV337*010#NJ | V | 330 | 10 | 33 | 10 | 0.9 | 1 ¹⁾ |
| TAJE477*010#NJ | E | 470 | 10 | 47 | 10 | 0.5 | 1 ¹⁾ |
| TAJU477*010RNJ | U | 470 | 10 | 47 | 12 | 0.5 | 1 ¹⁾ |
| TAJV477*010#NJ | V | 470 | 10 | 47 | 10 | 0.5 | 1 ¹⁾ |
| 16 Volt @ 85°C (10 Volt @ 125°C) | | | | | | | |
| TAJA225*016#NJ | A | 2.2 | 16 | 0.5 | 6 | 6.5 | 1 |
| TAJA335*016#NJ | A | 3.3 | 16 | 0.5 | 6 | 5 | 1 |
| TAJB335*016#NJ | B | 3.3 | 16 | 0.5 | 6 | 4.5 | 1 |
| TAJA475*016#NJ | A | 4.7 | 16 | 0.8 | 6 | 4 | 1 |
| TAJB475*016#NJ | B | 4.7 | 16 | 0.8 | 6 | 3.5 | 1 |
| TAJA685*016#NJ | A | 6.8 | 16 | 1.1 | 6 | 3.5 | 1 |
| TAJB685*016#NJ | B | 6.8 | 16 | 1.1 | 6 | 2.5 | 1 |
| TAJA106*016#NJ | A | 10 | 16 | 1.6 | 6 | 3 | 1 |
| TAJB106*016#NJ | B | 10 | 16 | 1.6 | 6 | 2.8 | 1 |
| TAJC106*016#NJ | C | 10 | 16 | 1.6 | 6 | 2 | 1 |
| TAJA156M016#NJ | A | 15 | 16 | 2.4 | 6 | 2 | 1 |
| TAJB156*016#NJ | B | 15 | 16 | 2.4 | 6 | 2.5 | 1 |
| TAJC156*016#NJ | C | 15 | 16 | 2.4 | 6 | 1.8 | 1 |
| TAJB226*016#NJ | B | 22 | 16 | 3.5 | 6 | 2.3 | 1 |
| TAJC226*016#NJ | C | 22 | 16 | 3.5 | 6 | 1 | 1 |

¹⁾ Dry pack option (see How to order) recommended for reduction of stress during soldering. Dry pack parts should be treated as MSL 3.

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

For AEC-Q200 availability, please contact AVX.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts.

DCL is measured at rated voltage after 5 minutes.

For typical weight and composition see page 144.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.



RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Cap (µF) | Rated Voltage (V) | DCL (µA) Max. | DF % Max. | ESR Max. (Ω) @100kHz | MSL |
|---|-----------|----------|-------------------|---------------|-----------|----------------------|-----------------|
| TAJD226*016#NJ | D | 22 | 16 | 3.5 | 6 | 1.1 | 1 |
| TAJB336*016#NJ | B | 33 | 16 | 5.3 | 8 | 2.1 | 1 |
| TAJC336*016#NJ | C | 33 | 16 | 5.3 | 6 | 1.5 | 1 |
| TAJD336*016#NJ | D | 33 | 16 | 5.3 | 6 | 0.9 | 1 |
| TAJC476*016#NJ | C | 47 | 16 | 7.5 | 6 | 0.5 | 1 |
| TAJD476*016#NJ | D | 47 | 16 | 7.5 | 6 | 0.9 | 1 |
| TAJC686*016#NJ | C | 68 | 16 | 10.9 | 6 | 1.3 | 1 |
| TAJD686*016#NJ | D | 68 | 16 | 10.9 | 6 | 0.9 | 1 |
| TAJC107*016#NJ | C | 100 | 16 | 16 | 8 | 1 | 1 |
| TAJD107*016#NJ | D | 100 | 16 | 16 | 6 | 0.6 | 1 |
| TAJE107*016#NJ | E | 100 | 16 | 16 | 6 | 0.9 | 1 ¹⁾ |
| TAJD157*016#NJ | D | 150 | 16 | 24 | 6 | 0.9 | 1 |
| TAJE157*016#NJ | E | 150 | 16 | 23 | 8 | 0.3 | 1 ¹⁾ |
| TAJV157*016#NJ | V | 150 | 16 | 24 | 8 | 0.5 | 1 ¹⁾ |
| TAJE227*016#NJ | E | 220 | 16 | 35.2 | 10 | 0.5 | 1 ¹⁾ |
| TAJV227*016#NJ | V | 220 | 16 | 35.2 | 8 | 0.9 | 1 ¹⁾ |
| TAJE337M016#NJ | E | 330 | 16 | 52.8 | 30 | 0.4 | 1 ¹⁾ |
| 20 Volt @ 85°C (13 Volt @ 125°C) | | | | | | | |
| TAJA105*020#NJ | A | 1 | 20 | 0.5 | 4 | 9 | 1 |
| TAJA155*020#NJ | A | 1.5 | 20 | 0.5 | 6 | 6.5 | 1 |
| TAJA225*020#NJ | A | 2.2 | 20 | 0.5 | 6 | 5.3 | 1 |
| TAJB225*020#NJ | B | 2.2 | 20 | 0.5 | 6 | 3.5 | 1 |
| TAJA335*020#NJ | A | 3.3 | 20 | 0.7 | 6 | 4.5 | 1 |
| TAJB335*020#NJ | B | 3.3 | 20 | 0.7 | 6 | 3 | 1 |
| TAJA475*020#NJ | A | 4.7 | 20 | 0.9 | 6 | 4 | 1 |
| TAJB475*020#NJ | B | 4.7 | 20 | 0.9 | 6 | 3 | 1 |
| TAJA685*020#NJ | A | 6.8 | 20 | 1.4 | 6 | 2.4 | 1 |
| TAJB685*020#NJ | B | 6.8 | 20 | 1.4 | 6 | 2.5 | 1 |
| TAJC685*020#NJ | C | 6.8 | 20 | 1.4 | 6 | 2 | 1 |
| TAJB106*020#NJ | B | 10 | 20 | 2 | 6 | 2.1 | 1 |
| TAJC106*020#NJ | C | 10 | 20 | 2 | 6 | 1.2 | 1 |
| TAJB156*020#NJ | B | 15 | 20 | 3 | 6 | 2 | 1 |
| TAJC156*020#NJ | C | 15 | 20 | 3 | 6 | 1.7 | 1 |
| TAJB226*020#NJ | B | 22 | 20 | 4.4 | 6 | 1.8 | 1 |
| TAJC226*020#NJ | C | 22 | 20 | 4.4 | 6 | 1.6 | 1 |
| TAJD226*020#NJ | D | 22 | 20 | 4.4 | 6 | 0.9 | 1 |
| TAJC336*020#NJ | C | 33 | 20 | 6.6 | 6 | 1.5 | 1 |
| TAJD336*020#NJ | D | 33 | 20 | 6.6 | 6 | 0.9 | 1 |
| TAJC476*020#NJ | C | 47 | 20 | 9.4 | 6 | 0.5 | 1 |
| TAJD476*020#NJ | D | 47 | 20 | 9.4 | 6 | 0.9 | 1 |
| TAJE476*020#NJ | E | 47 | 20 | 9.4 | 6 | 0.9 | 1 ¹⁾ |
| TAJC686M020#NJ | C | 68 | 20 | 13.6 | 8 | 0.5 | 1 |
| TAJD686*020#NJ | D | 68 | 20 | 13.6 | 6 | 0.4 | 1 |
| TAJE686*020#NJ | E | 68 | 20 | 13.6 | 6 | 0.9 | 1 ¹⁾ |
| TAJD107*020#NJ | D | 100 | 20 | 20 | 6 | 0.5 | 1 |
| TAJE107*020#NJ | E | 100 | 20 | 20 | 6 | 0.4 | 1 ¹⁾ |
| TAJV107*020#NJ | V | 100 | 20 | 20 | 8 | 0.9 | 1 ¹⁾ |
| TAJE157*020#NJ | E | 150 | 20 | 30 | 8 | 0.3 | 1 ¹⁾ |
| TAJV157*020#NJ | V | 150 | 20 | 30 | 8 | 0.3 | 1 ¹⁾ |
| 25 Volt @ 85°C (17 Volt @ 125°C) | | | | | | | |
| TAJA474*025#NJ | A | 0.47 | 25 | 0.5 | 4 | 14 | 1 |
| TAJA684*025#NJ | A | 0.68 | 25 | 0.5 | 4 | 10 | 1 |
| TAJA105*025#NJ | A | 1 | 25 | 0.5 | 4 | 8 | 1 |
| TAJA155*025#NJ | A | 1.5 | 25 | 0.5 | 6 | 7.5 | 1 |
| TAJB155*025#NJ | B | 1.5 | 25 | 0.5 | 6 | 5 | 1 |
| TAJA225*025#NJ | A | 2.2 | 25 | 0.6 | 6 | 7 | 1 |
| TAJB225*025#NJ | B | 2.2 | 25 | 0.6 | 6 | 4.5 | 1 |
| TAJA335*025#NJ | A | 3.3 | 25 | 0.8 | 6 | 3.7 | 1 |

| AVX Part No. | Case Size | Cap (µF) | Rated Voltage (V) | DCL (µA) Max. | DF % Max. | ESR Max. (Ω) @100kHz | MSL |
|---|-----------|----------|-------------------|---------------|-----------|----------------------|-----------------|
| TAJB335*025#NJ | B | 3.3 | 25 | 0.8 | 6 | 3.5 | 1 |
| TAJA475*025#NJ | A | 4.7 | 25 | 1.2 | 6 | 3.1 | 1 |
| TAJB475*025#NJ | B | 4.7 | 25 | 1.2 | 6 | 1.5 | 1 |
| TAJB685*025#NJ | B | 6.8 | 25 | 1.7 | 6 | 2.8 | 1 |
| TAJC685*025#NJ | C | 6.8 | 25 | 1.7 | 6 | 2 | 1 |
| TAJB106*025#NJ | B | 10 | 25 | 2.5 | 6 | 2.5 | 1 |
| TAJC106*025#NJ | C | 10 | 25 | 2.5 | 6 | 1.8 | 1 |
| TAJD106*025#NJ | D | 10 | 25 | 2.5 | 6 | 1.2 | 1 |
| TAJC156*025#NJ | C | 15 | 25 | 3.8 | 6 | 1.6 | 1 |
| TAJD156*025#NJ | D | 15 | 25 | 3.8 | 6 | 1 | 1 |
| TAJC226*025#NJ | C | 22 | 25 | 5.5 | 6 | 1.4 | 1 |
| TAJD226*025#NJ | D | 22 | 25 | 5.5 | 6 | 0.9 | 1 |
| TAJD336*025#NJ | D | 33 | 25 | 8.3 | 6 | 0.9 | 1 |
| TAJE336*025#NJ | E | 33 | 25 | 8.3 | 6 | 0.9 | 1 ¹⁾ |
| TAJD476*025#NJ | D | 47 | 25 | 11.8 | 6 | 0.9 | 1 |
| TAJE476*025#NJ | E | 47 | 25 | 11.8 | 6 | 0.9 | 1 ¹⁾ |
| TAJE686*025#NJ | E | 68 | 25 | 17 | 6 | 0.9 | 1 ¹⁾ |
| TAJV686*025#NJ | V | 68 | 25 | 17 | 6 | 0.9 | 1 ¹⁾ |
| TAJE107M025#NJ | E | 100 | 25 | 25 | 10 | 0.3 | 1 ¹⁾ |
| TAJV107*025#NJ | V | 100 | 25 | 25 | 8 | 0.4 | 1 ¹⁾ |
| TAJV157M025#NJ | V | 150 | 25 | 37.5 | 10 | 0.4 | 1 ¹⁾ |
| 35 Volt @ 85°C (23 Volt @ 125°C) | | | | | | | |
| TAJA104*035#NJ | A | 0.1 | 35 | 0.5 | 4 | 24 | 1 |
| TAJA154*035#NJ | A | 0.15 | 35 | 0.5 | 4 | 21 | 1 |
| TAJA224*035#NJ | A | 0.22 | 35 | 0.5 | 4 | 18 | 1 |
| TAJA334*035#NJ | A | 0.33 | 35 | 0.5 | 4 | 15 | 1 |
| TAJA474*035#NJ | A | 0.47 | 35 | 0.5 | 4 | 12 | 1 |
| TAJB474*035#NJ | B | 0.47 | 35 | 0.5 | 4 | 10 | 1 |
| TAJA684*035#NJ | A | 0.68 | 35 | 0.5 | 4 | 8 | 1 |
| TAJB684*035#NJ | B | 0.68 | 35 | 0.5 | 4 | 8 | 1 |
| TAJA105*035#NJ | A | 1 | 35 | 0.5 | 4 | 7.5 | 1 |
| TAJB105*035#NJ | B | 1 | 35 | 0.5 | 4 | 6.5 | 1 |
| TAJA155*035#NJ | A | 1.5 | 35 | 0.5 | 6 | 7.5 | 1 |
| TAJB155*035#NJ | B | 1.5 | 35 | 0.5 | 6 | 5.2 | 1 |
| TAJC155*035#NJ | C | 1.5 | 35 | 0.5 | 6 | 4.5 | 1 |
| TAJA225*035#NJ | A | 2.2 | 35 | 0.8 | 6 | 4.5 | 1 |
| TAJB225*035#NJ | B | 2.2 | 35 | 0.8 | 6 | 4.2 | 1 |
| TAJC225*035#NJ | C | 2.2 | 35 | 0.8 | 6 | 3.5 | 1 |
| TAJB335*035#NJ | B | 3.3 | 35 | 1.2 | 6 | 3.5 | 1 |
| TAJC335*035#NJ | C | 3.3 | 35 | 1.2 | 6 | 2.5 | 1 |
| TAJB475*035#NJ | B | 4.7 | 35 | 1.6 | 6 | 3.1 | 1 |
| TAJC475*035#NJ | C | 4.7 | 35 | 1.6 | 6 | 2.2 | 1 |
| TAJD475*035#NJ | D | 4.7 | 35 | 1.6 | 6 | 1.5 | 1 |
| TAJC685*035#NJ | C | 6.8 | 35 | 2.4 | 6 | 1.8 | 1 |
| TAJD685*035#NJ | D | 6.8 | 35 | 2.4 | 6 | 1.3 | 1 |
| TAJC106*035#NJ | C | 10 | 35 | 3.5 | 6 | 1.6 | 1 |
| TAJD106*035#NJ | D | 10 | 35 | 3.5 | 6 | 1 | 1 |
| TAJE106*035#NJ | E | 10 | 35 | 3.5 | 6 | 0.9 | 1 ¹⁾ |
| TAJC156*035#NJ | C | 15 | 35 | 5.3 | 6 | 1.4 | 1 |
| TAJD156*035#NJ | D | 15 | 35 | 5.3 | 6 | 0.9 | 1 |
| TAJD226*035#NJ | D | 22 | 35 | 7.7 | 6 | 0.9 | 1 |
| TAJE226*035#NJ | E | 22 | 35 | 7.7 | 6 | 0.5 | 1 ¹⁾ |
| TAJD336*035#NJ | D | 33 | 35 | 11.6 | 6 | 0.9 | 1 |
| TAJE336*035#NJ | E | 33 | 35 | 11.6 | 6 | 0.9 | 1 ¹⁾ |
| TAJV336*035#NJ | V | 33 | 35 | 11.6 | 6 | 0.5 | 1 ¹⁾ |
| TAJE476*035#NJ | E | 47 | 35 | 16.5 | 6 | 0.9 | 1 ¹⁾ |
| TAJV476*035#NJ | V | 47 | 35 | 16.5 | 6 | 0.4 | 1 ¹⁾ |
| TAJV686*035#NJ | V | 68 | 35 | 23.8 | 6 | 0.5 | 1 ¹⁾ |

¹⁾ Dry pack option (see How to order) recommended for reduction of stress during soldering. Dry pack parts should be treated as MSL 3.

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

For AEC-Q200 availability, please contact AVX.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

For typical weight and composition see page 144.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Cap (µF) | Rated Voltage (V) | DCL (µA) Max. | DF % Max. | ESR Max. (Ω) @100kHz | MSL |
|---|-----------|----------|-------------------|---------------|-----------|----------------------|-----------------|
| 50 Volt @ 85°C (33 Volt @ 125°C) | | | | | | | |
| TAJA104*050#NJ | A | 0.1 | 50 | 0.5 | 4 | 22 | 1 |
| TAJA154*050#NJ | A | 0.15 | 50 | 0.5 | 4 | 15 | 1 |
| TAJB154*050#NJ | B | 0.15 | 50 | 0.5 | 4 | 17 | 1 |
| TAJA224*050#NJ | A | 0.22 | 50 | 0.5 | 4 | 18 | 1 |
| TAJB224*050#NJ | B | 0.22 | 50 | 0.5 | 4 | 14 | 1 |
| TAJA334*050#NJ | A | 0.33 | 50 | 0.5 | 4 | 17 | 1 |
| TAJB334*050#NJ | B | 0.33 | 50 | 0.5 | 4 | 12 | 1 |
| TAJA474*050#NJ | A | 0.47 | 50 | 0.5 | 4 | 9.5 | 1 |
| TAJB474*050#NJ | B | 0.47 | 50 | 0.7 | 4 | 9.5 | 1 |
| TAJC474*050#NJ | C | 0.47 | 50 | 0.5 | 4 | 8 | 1 |
| TAJA684*050#NJ | A | 0.68 | 50 | 0.5 | 4 | 7.9 | 1 |
| TAJB684*050#NJ | B | 0.68 | 50 | 0.5 | 4 | 8 | 1 |
| TAJC684*050#NJ | C | 0.68 | 50 | 0.5 | 4 | 7 | 1 |
| TAJA105M050#NJ | A | 1 | 50 | 0.5 | 4 | 6.6 | 1 |
| TAJB105*050#NJ | B | 1 | 50 | 0.5 | 6 | 7 | 1 |
| TAJC105*050#NJ | C | 1 | 50 | 0.5 | 4 | 5.5 | 1 |
| TAJB155*050#NJ | B | 1.5 | 50 | 0.8 | 8 | 5.4 | 1 |
| TAJC155*050#NJ | C | 1.5 | 50 | 0.8 | 6 | 4.5 | 1 |
| TAJD155*050#NJ | D | 1.5 | 50 | 0.8 | 6 | 4 | 1 |
| TAJB225*050#NJ | B | 2.2 | 50 | 1.1 | 8 | 4.5 | 1 |
| TAJC225*050#NJ | C | 2.2 | 50 | 1.1 | 8 | 2.5 | 1 |
| TAJD225*050#NJ | D | 2.2 | 50 | 1.1 | 6 | 2.5 | 1 |
| TAJC335*050#NJ | C | 3.3 | 50 | 1.6 | 6 | 2.5 | 1 |
| TAJD335*050#NJ | D | 3.3 | 50 | 1.7 | 6 | 2 | 1 |
| TAJC475*050#NJ | C | 4.7 | 50 | 0.5 | 4 | 1.4 | 1 |
| TAJD475*050#NJ | D | 4.7 | 50 | 2.4 | 6 | 1.4 | 1 |
| TAJC685*050#NJ | C | 6.8 | 50 | 3.4 | 6 | 1 | 1 |
| TAJD685*050#NJ | D | 6.8 | 50 | 3.4 | 6 | 1 | 1 |
| TAJD106*050#NJ | D | 10 | 50 | 5 | 6 | 0.8 | 1 |
| TAJE106*050#NJ | E | 10 | 50 | 5 | 6 | 1 | 1 ¹⁾ |
| TAJV106*050#NJ | V | 10 | 50 | 5 | 6 | 0.65 | 1 ¹⁾ |
| TAJD156*050#NJ | D | 15 | 50 | 7.5 | 6 | 0.6 | 1 |
| TAJE156*050#NJ | E | 15 | 50 | 7.5 | 6 | 0.6 | 1 ¹⁾ |
| TAJV156*050#NJ | V | 15 | 50 | 7.5 | 6 | 0.6 | 1 ¹⁾ |
| TAJV226*050#NJ | V | 22 | 50 | 11 | 8 | 0.6 | 1 ¹⁾ |

¹⁾ Dry pack option (see How to order) recommended for reduction of stress during soldering. Dry pack parts should be treated as MSL 3.

For AEC-Q200 availability, please contact AVX.

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5V RMS with a maximum DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

For typical weight and composition see page 144.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.